




Product Sheet

Propeller:20 x 6.7 P PN:2200671

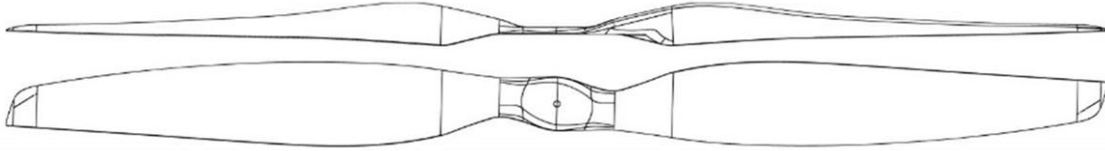

Rotation direction	clockwise (CW)
Material	carbon fiber, glass fiber, roving, polyurethane, epoxy
Weight	30 g \pm 10%
Central hole	\varnothing 4 mm – hole size can be increased or reduced based on the requirement
Mounting pattern	mounting holes can be drilled up to \varnothing 26 mm (2x bolts), \varnothing 18 mm (4x bolts) diameter
Diameter	20" (508 mm \pm 1%)
Pitch	6.7" measured at 75% of propeller blade
Maximal RPM	9000 RPM (0.7 Mach)
Working Temp	-40 °C up to +65 °C
Standard testing	balance, visual Inspection, structural integrity (ATO)



Test Results

Test type

Static testing – Ramp up test

Ambient condition

15 °C, 1.013 bars air pressure,
60% Relative humidity

