




Product Sheet

Propeller:32 x 10.6 PN:23210601

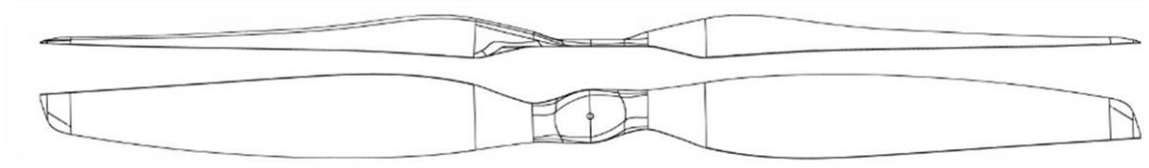

Rotation direction	counter-clockwise (CCW)
Material	carbon fiber, glass fiber, roving, polyurethane, epoxy
Weight	100 g \pm 10%
Central hole	\varnothing 10 mm – hole size can be increased or reduced based on the requirement
Mounting pattern	mounting holes can be drilled up to \varnothing 38 mm (2x bolts), \varnothing 30 mm (4x bolts) diameter
Diameter	32" (812.8 mm \pm 1%)
Pitch	10.6" measured at 75% of propeller blade
Maximal RPM	5600 RPM (0.7 Mach)
Working Temp	-40 °C up to +65 °C
Standard testing	balance, visual Inspection, structural integrity (ATO)



Test Results

Test type

Static testing – Ramp up test

Ambient condition

15 °C, 1.013 bars air pressure,
60% Relative humidity

