

System Specifications



2.33 Kg

Maximal Thrust:



15"

Propeller
Diameter



22.2 V

Voltage



246 g

Mass

Motor

Name:	MII-4010-400KV
Manufacturer:	Scorpion
KV [RPM/V]:	384
Mass (Inc. Cables) [g]:	154
Max Continuous Current [A]:	40
Max Peak Current (2s) [A]:	56
Voltage [V]:	42
Contact:	support@spihk.com

ESC

Name:	Tribunus 06-80A ESC SBEC
Manufacturer:	Scorpion
Mass (Inc. Cables) [g]:	74
Max continuous Current [A]:	80
Max peak Current (2s) [A]:	120
Voltage [V]:	26.1
Contact:	support@spihk.com

Propeller



Name:	15x5
Manufacturer:	Mejlík
Diameter ["]:	15
Pitch ["]:	5
Mass [g]:	18
Contact:	info@mejlík.eu

Measurements

ID 0030

Throttle [%]	Rotational Speed [RPM]	Thrust [kg]	Torque [Nm]	Voltage [V]	Current [A]	Mechanical Power [W]	Electrical Power [W]	System Efficiency [%] ^[1]
20	1599	0.11	0.02	22.3	0.3	3.9	6.8	56.8
29	2239	0.23	0.05	22.3	0.7	10.8	15.8	68.6
38	2874	0.41	0.08	22.3	1.4	23.4	30.6	76.5
47	3484	0.61	0.12	22.2	2.4	42.2	52.8	79.9
56	4064	0.85	0.16	22.2	3.8	67.2	83.8	80.2
64	4597	1.10	0.20	22.2	5.5	98.2	121.9	80.6
73	5119	1.38	0.26	22.1	7.7	137.0	170.7	80.3
82	5611	1.68	0.31	22.1	10.3	182.2	228.4	79.8
91	6084	1.99	0.37	22.0	13.4	232.9	295.0	79.0
100	6526	2.33	0.43	22.0	17.1	291.8	374.5	77.9

Temperature: 26°C, Air Pressure: 1005hPa, Relative Humidity: 28%

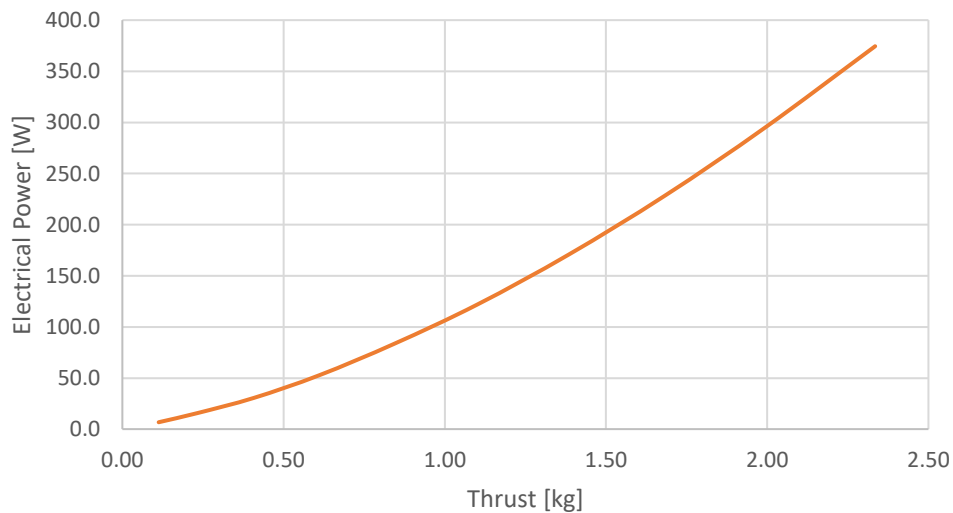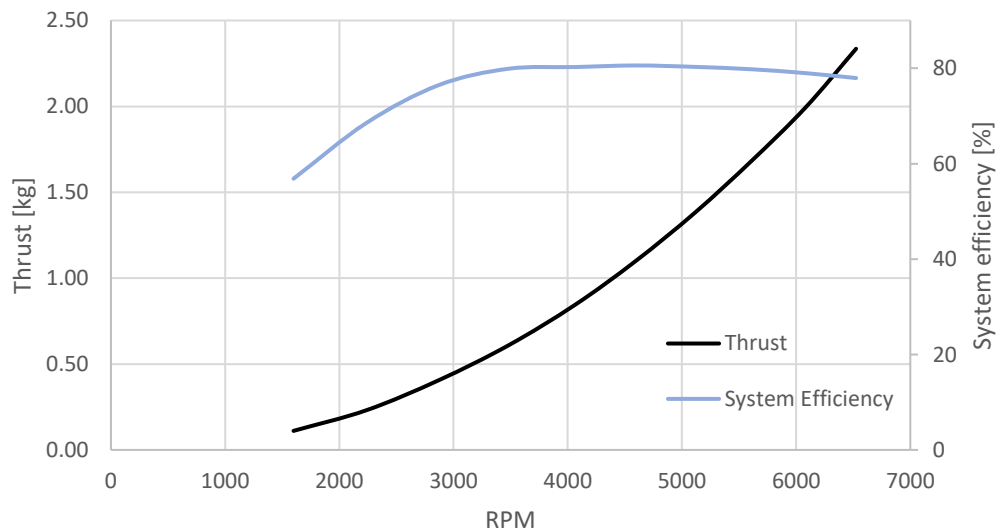

^[1] Includes motor efficiency, controller efficiency, wire and connectors losses.